



## Slat chain conveyor

Conveyor type: SLT


Our slat chain conveyor is mostly common in bottling and canning plants but many other applications also exist. The conveyor is made from all non-corrosive materials to make it fully wash down. SLT benefits from using standard type slat chain. The slat chain conveyor is fully modular for easy installation and reconfiguring.



### Features and Accessories

- High density wear strip for high speed applications.
- Large radius curves for stable conveying off bottles.
- Straight inline side transfers.
- Adjustable side rails
- Adjustable legs

| Specifications  | SLT 83                         | SLT 190                        | SLT 254                        | SLT 305                        |
|-----------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Conveyor Width  | 83 mm                          | 190 mm                         | 254 mm                         | 305 mm                         |
| Conveyor Length | 0.5— 30m                       | 0.5— 25m                       | 0.5— 25m                       | 0.5— 20m                       |
| Load capacity   | 150kg                          | 200kg                          | 200kg                          | 200kg                          |
| Speed           | 5—64 m/min                     | 5—46 m/min                     | 5—46 m/min                     | 5—46 m/min                     |
| Side Rails      | ø12 round bar fully adjustable | ø12 round bar fully adjustable | ø12 round bar fully adjustable | ø12 round bar fully adjustable |
| Legs            | Adjustable in height and angle | Adjustable in height and angle | Adjustable in height and angle | Adjustable in height and angle |

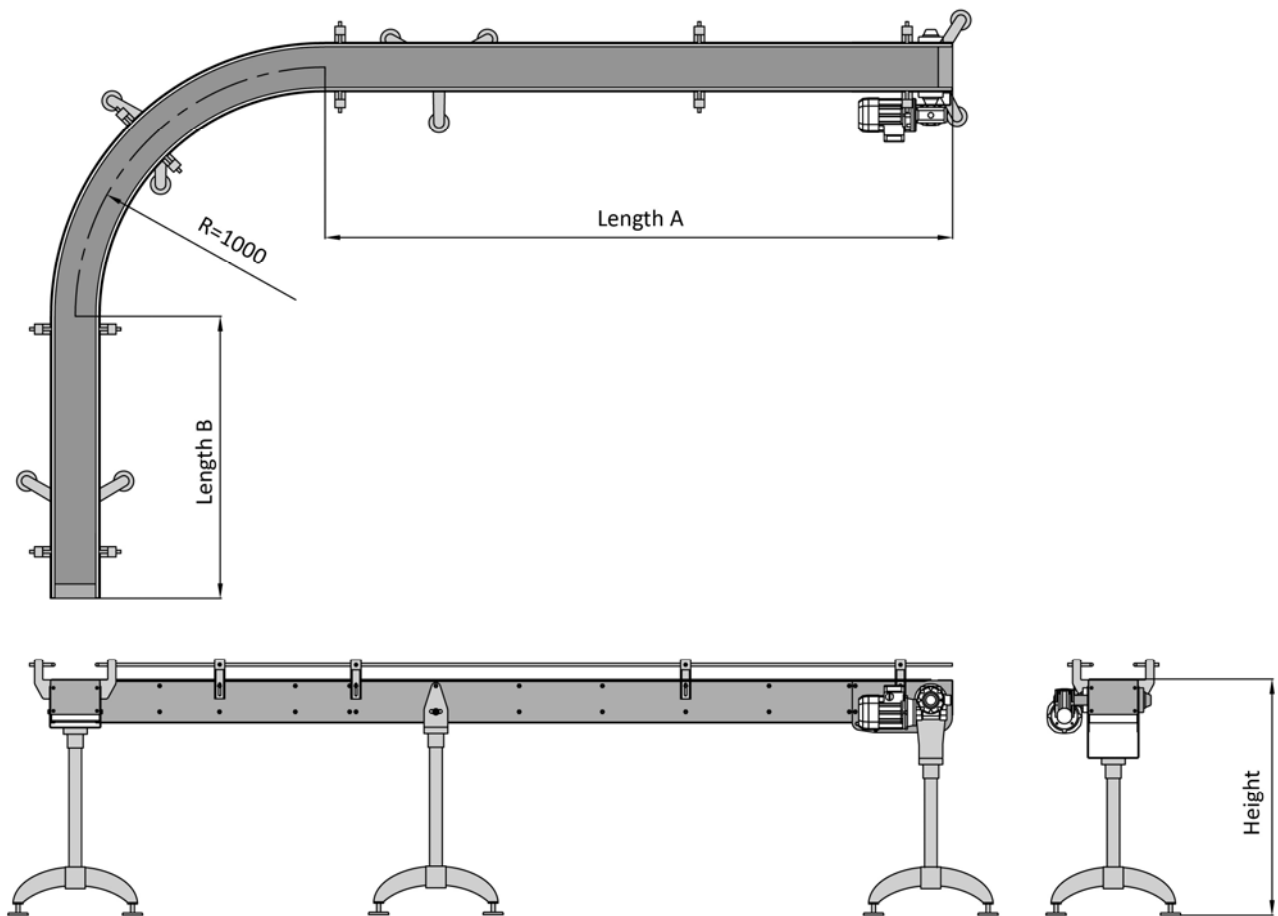

**THIRDLINE Pty Ltd**  
[sales@thirdline.com.au](mailto:sales@thirdline.com.au)  
[www.thirdlineconveyors.com](http://www.thirdlineconveyors.com)

111 Wendouree Crescent  
 Westlake QLD 4074

Phone: +61(0)7 3102 4090  
 Fax: +61(0)7 3102 4833